

FEATURES & SPECIFICATIONS



Viscosity sensor



9200 transmitter

Typical Full Scale Range: 1000 cP*

Temperature: up to 200°C*

Pressure: up to 60 bar*

Material: 316L SS (electropolish in option)

Ingress Protection: IP67

316L SS tri-clamp mounting flange (2'')**

Cf technical datasheet 358

* Other available on demand

** Seals with FDA certificate on request

Viscosity transmitter

2-line alphanumeric backlighting LCD screen


1 x 4-20 mA output

Operating temperature: 0-40°C

Panel-mount type

Cf technical datasheet 256

MAIN MOUNTINGS

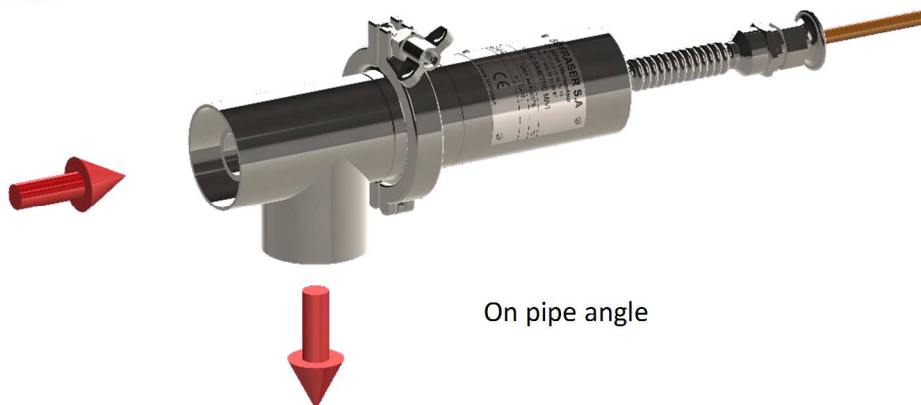

On pipe angle

Any questions or specific needs regarding other viscosity solutions?
 Let us help you find the best match for your process by **contacting us** at:
instruments@sofraser.com